HFA4

SAFETY RELAY (RELAY WITH FORCIBLY GUIDED CONTACTS)





File No.:40034342



Features

- Multi contact arrangements: 2NO+2NC, 3NO+1NC
- Forcibly guided contacts according to EN50205
- 6A switching capabilityLow input power: 360mW
- High insulation capability: 10kV surge voltage between input and output
- UL insulation system: Class F available

CONTACT DATA

CONTINUE DATE					
Contact arrangement	2NO+2NC (2H2D type)				
Contact arrangement	3NO+1NC (3H1D type)				
Forcibly guided contacts Type (according to EN50205)	Type A				
Contact resistance ¹⁾	100mΩ max. (at 1A 6VDC)				
Contact material	AgSnO ₂				
Contact rating (Res. load)	6A 250VAC / 30VDC				
Max. switching voltage	400VAC / 30VDC				
Max. switching current	6A				
Max. switching power	1500VA /180W				
Mechanical endurance	1 x 10 ⁷ ops				
Electrical endurance	1 x 10 ⁵ OPS (1NO: 6A 30VDC Resistive load, Room temp., 1s on 9s off 1 x 10 ⁵ OPS (1NO: 6A 250VAC Resistive load, Room temp., 1s on 9s off				

Notes: 1) The data shown above are initial values.

COIL	
Coil power	Approx. 360mW

COIL DATA at 23°C

ı				0.1200			
	Nominal Voltage VDC	Pick-up Voltage VDC max. ¹⁾	Drop-out Voltage VDC min. ¹⁾	Max. Voltage VDC ²⁾	Coil resistance Ω		
6		4.5	0.6	7.8	100 x (1±10%)		
	9	6.8	0.9	11.7	225 x (1±10%)		
12 9		9.0	1.2	15.6	400 x (1±10%)		
	18	13.5	1.8	23.4	900 x (1±10%)		
	24	18.0	2.4	31.2	1600 x (1±10%)		
36 48 ³⁾		27.0	3.6	46.8	3600 x (1±10%)		
		36.0	4.8	62.4	6400 x (1±10%)		

Notes: 1) The data shown above are initial values.

- 2) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.
- 3) For products with rated voltage ≥ 48V, measures should be taken to prevent coil overvoltage in order to protect coil in test and application (eg. Connect diodes in parallel).

CHARACTERISTICS

Insulation	resistance	1000MΩ (at 500VDC)			
	Between coil & contacts	4000VAC 1 mir			
Dielectric	Between open contacts	1500VAC 1 min			
strength	Between contact sets	2500VAC 1 min (7-8/9-10)			
	Detween contact sets	4000VAC 1 min (Other)			
Surge	Between coil & contacts	10kV (1.2 / 50µs			
voltage	Between contact sets	5kV (1.2 / 50µs)			
Operate t	ime (at rated voltage)	20ms max.			
Release	time (at rated voltage)	20ms max.			
Temperati	ure rise (at rated voltage)	≤60K (Coil driving voltage: 1.1 times Un, Contact current -carrying: rated current, at 85 °C)			
Vibration	resistance	NO/NC:10Hz to 55Hz 1.5mm DA NO:55Hz to 200Hz, 98m/s ² NC:55Hz to 200Hz, 49m/s ²			
Shock	Functional	100m/s ²			
resistanc	Destructive	980m/s ²			
Creepage	Between coil & contacts	8mm			
distance	Between contacts	5.5mm			
Clearance	Between coil & contacts	8mm			
distance	Between contacts	5.5mn			
Humidity		5% to 85% RH			
Ambient t	emperature	-40°C to 85°C			
Terminati	on	PCB			
Unit weig	ht	Approx. 20g			
Construc	tion	Flux proofed			

Notes: 1) The data shown above are initial values. 2) UL insulation system: Class F, Class B.

SAFETY APPROVAL RATINGS

UL/CUL	6A 277VAC / 250VAC / 125VAC at 85°C 6A 30VDC at 85°C
	Pilot duty: 2A 240VAC at room temp.
	6A 250VAC at 85°C
	6A 30VDC at 85°C
VDE	AC-15: 1.5A 240VAC at room temp.
	AC-15: 2A 240VAC at room temp

Notes: 1) All values unspecified are at room temperature.


2) Only typical loads are listed above. Other load specifications can be available upon request.



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED

2020 Rev. 1.01

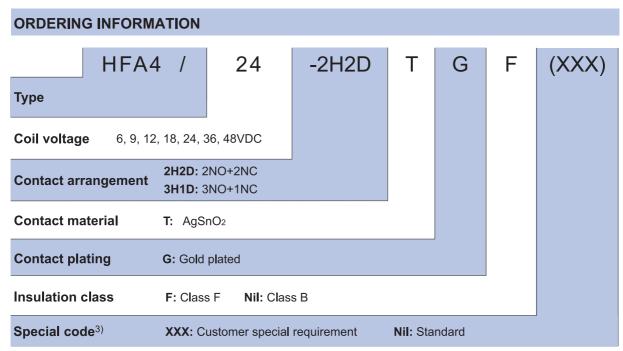

Notes: 1) This product is a soldering flux type products, when the product into the PCB plate welding does not allow for cleaning.

2) For gold plated type, the min. switching current and min. switching voltage is 10mA 5VDC. If customers have special requirment of load, please contact us for suggestion about suitable parts.


13


10.16


3) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm













PCB Layout (Bottom view)



HFA4/□□-3H1DTG(□□□)

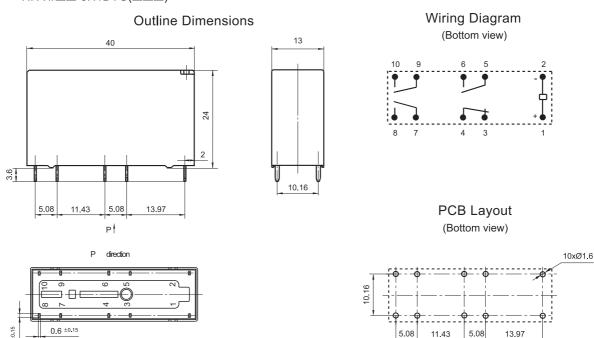


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.


2) The tolerance without indicating for PCB layout is always ±0.1mm.

CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER




ENDURANCE CURVE




Test conditions:1NO, Resistive load, 250VAC, Room temp., 1s on 9s off.

COIL TEMPERATURE RISE



Percentage Of Nominal Coil Voltage

Relay Sockets



Features

- \bullet The dielectric strength (between coil and contacts) can reach 2500VAC and the insulation resistance is 1000 M Ω
- DIN rail or Screw mounting
- With diode to protect the coil and to eliminate the converse current
- With finger protection device
- Buit-in retainer and exfractor


CHARACTERISTICS

Туре			Applicable coil voltage of relay		Torque*	Max.wire cross section mm ²	Wire Strip Length	Unit weight	Notes
A4-4Z-C2-D24	250VAC	6A	(6 to 24)VDC	-25 °C to 55°C	1.0N m	2 x1.5	7mm	Approx. 49g	With LED
A4-4Z-C2-D60	250VAC	6A	(36 to 60)VDC	-25 °C to 55°C	1.0N · m	2 x1.5	7mm	Approx. 49g	With LED
A4-4Z-C2-D110	250VAC	6A	(85 to 110)VDC	-25 °C to 55°C	1.0N m	2 x1.5	7mm	Approx. 49g	With LED
A4-4Z-C2	250VAC	6A	(6 to 110)VDC	-25 °C to 55°C	1.0N m	2 x1.5	7mm	Approx. 49g	Without LED

Notes: * Refers to wire-assembled torque.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND CIRCUIT DIAGRAM

Unit: mm

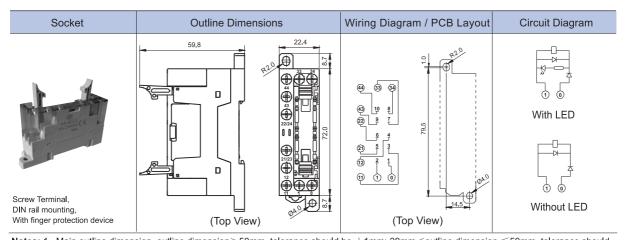

Notes: 1. Main outline dimension, outline dimension >50mm, tolerance should be ±1mm; 20mm < outline dimension ≤50mm, tolerance should be ±0.5mm;5mm < outline dimension ≤20mm, tolerance should be ±0.4mm; outline dimension ≤5mm, tolerance should be ±0.3mm.
 2. DIN rail mounting: recommend to use standard rail 35×7.5×1mm, 35×15×1mm.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.